



LIFTING CLAMP for U-shaped concrete gutters

with Drop down lid (Non-marring type)

CUC 500 · 1000

Clamp exclusively designed for use on reinforced concrete U-shaped gutters with drop down lids.

FEATURES

This non-marring clamp can fit to sidewall rims of U-shaped reinforced concrete gutters for drop down lids.


Simple strong lightweight designed

The durable polyurethane pads will not mar the work piece.

Warning!!

U-shaped reinforced concrete gutters with drop down lids (JIS standard)

Clamping range



Use two clamps together as a pair.

These clamps cannot be used on gutters with straight sidewalls.

When setting these clamps into position, keep the angle of the sling wire rope under 30 degrees.

SPECIFICATIONS

Item No.	Rated capacity (kg)	Jaw opening (mm)	Weight (kg)	Remarks
CUC 500	1000	40 ~ 60	6	
CUC1000	2000	65 ~ 90	15	

Values for one pair (2 pieces).

DIMENSIONS TABLE


(Unit:mm)

Item No.	A	B	C	D	E
CUC 500	290	365	100	24	200
CUC1000	400	460	120	30	230

EXAMPLE OF USE



Always lift work pieces at 2 or more points for safety.

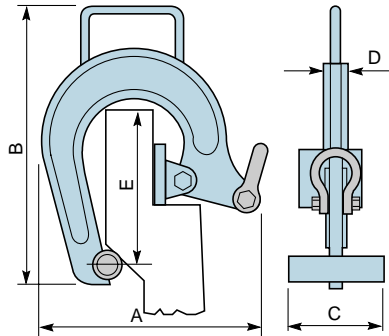

LIFTING HOOK for Concrete upside down gutters

(Ceiling open type) PAT.

KSC 1 · 2


FEATURES

- The hook will not interfere with a leveling string and will not need a clearance between concrete structures.
- The adjusting pins can change the clamping range in two phases.
- Hooking the master ring to the C-shaped link can keep the clamp unlocked.

EXAMPLE OF USE



Equipped with master ring and wire

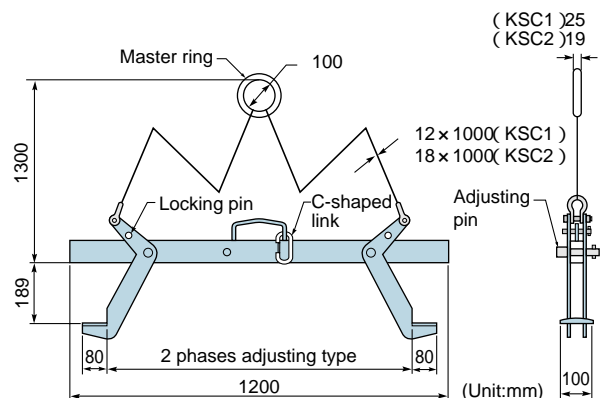

SPECIFICATIONS

Item No.	Rated capacity (ton)	Clamping range (mm) 2 phas adjustable pin type	Weight (kg)
KSC 1	1	490 ~ 505	20
KSC 2	2	990 ~ 1050	30