




H-SHAPED STEEL LIFTING CLAMP

HKC 0.5 ~ 1

Clamp for horizontal lifting of steel structures
(also can be used for any structured steels)

FEATURES


- H-beams lying on their sides can be lifted and handled horizontally.
- The spring-loaded tightening lock mechanism assures a positive initial clamping force.
- The clamping force increases in proportion to the weight of the load.
- The main body and the shackle are made of die-forged special alloy steels, which are optimally tempered for maximum strength and durability.
- High-frequency quenching of die-forged special alloy steels gives greater durability to the cam.
- The main body is a baked-on finished.

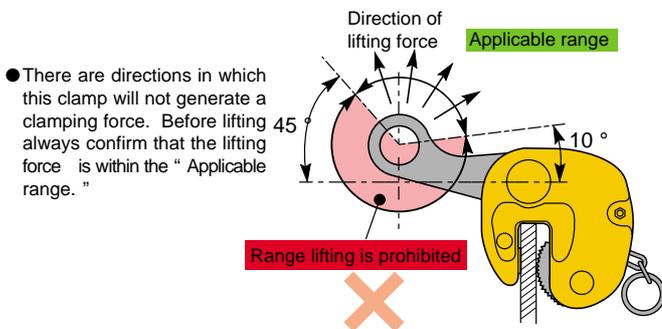


SPECIFICATIONS

Item No.	Rated capacity (ton)	Jaw opening (mm)	Weight (kg)	Remarks
HKC 0.5	0.5	0 ~ 20	3.4	
HKC 1	1	0 ~ 25	6.2	

EXAMPLES OF USE

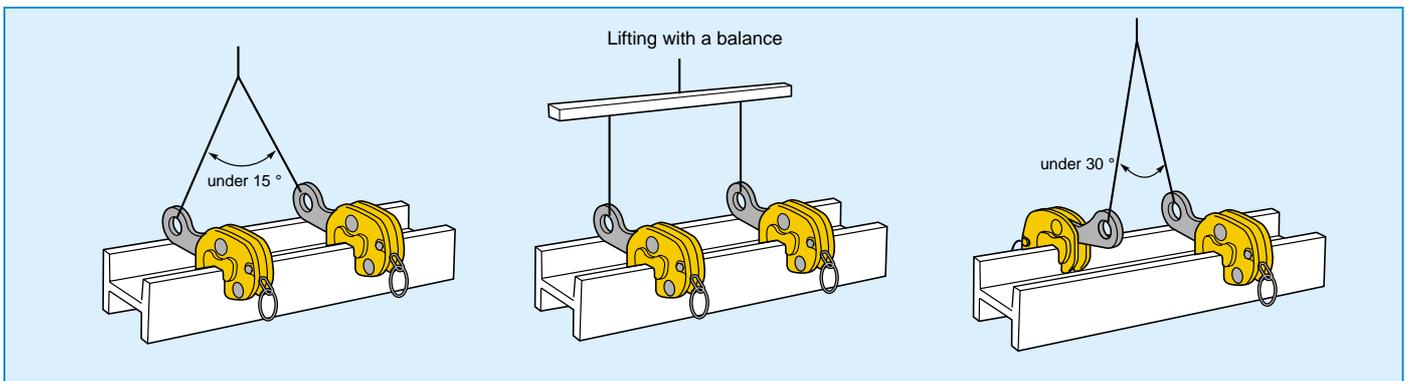

⚠ Always lift work pieces at 2 or more points for safety.

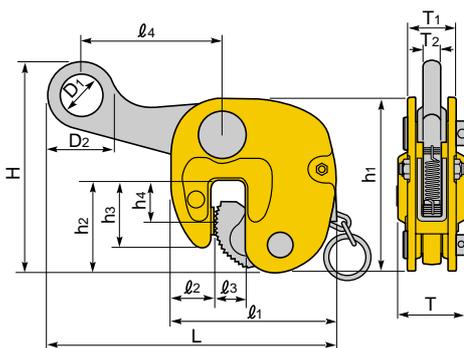

DIMENSIONS TABLE

(Unit:mm)

Item No.	H (MAX.)	h ₁	h ₂	h ₃	h ₄	L	l ₁	l ₂	l ₃	l ₄	T	T ₁	T ₂	D ₁	D ₂
HKC 0.5	186	140	74	53.5	33	255	131	31	24	135	48	42	16	40	60
HKC 1	206	170	90	65	40	280	160	42.5	29.5	137	63	47	16	40	65