

VERTICAL LIFTING CLAMP (Lock handle type with Universal shackle)

SVC 0.3E ~ 2E



Lightweight clamp primarily designed for the vertical lifting of steel plates. The unique design of this clamp also makes it possible for lifting work piece to any directions.


FEATURES

- The spring-loaded tightening lock mechanism assures a positive initial clamping force.
- The universal shackle allows the cam to generate a clamping force on the work piece no matter which direction it is pulled.
- The clamping force increases in proportion to the weight of the load.
- The main body and the shackle are made of die-forged special alloy steels, which are optimally tempered for maximum strength and durability.
- High-frequency quenching of die-forged special alloy steels gives greater durability to the cam.
- The main body is a baked-on finish.

SPECIFICATIONS


Item No.	Rated capacity (ton)	Jaw opening (mm)	Weight (kg)	Remarks
SVC 0.3E	0.3	0 ~ 16	1.6	
SVC 0.5E	0.5	0 ~ 19	2.1	
SVC 1E	1	0 ~ 25	3.7	
SVC 1.5E	1.5	0 ~ 28	5.5	
SVC 2E	2	0 ~ 32	7.0	

UNIVERSAL TYPE SHACKLE

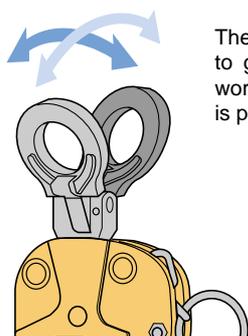


The Universal shackle allows the cam to generate a clamping force on the work piece no matter which direction it is pulled.

EXAMPLES OF USE

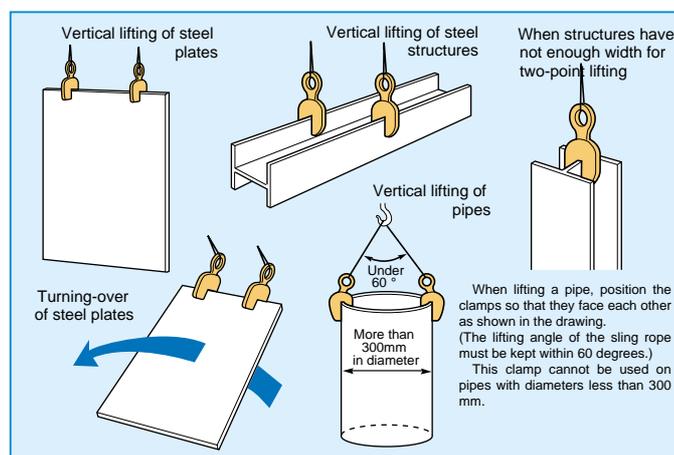

⚠ Always lift work pieces at 2 or more points for safety.

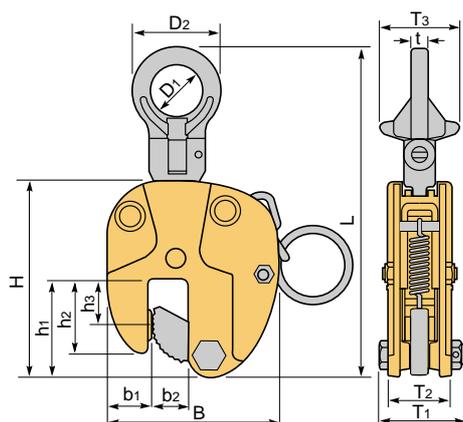

DIMENSIONS TABLE

(Unit:mm)

Item No.	L	H	h ₁	h ₂	h ₃	B	b ₁	b ₂	D ₁	D ₂	T ₁	T ₂	T ₃	t
SVC 0.3E	157 ~ 176	110	57	48	30	100	25	19	26	45	49	36	39	8
SVC 0.5E	180 ~ 204	125	67	53	34	110	28	22	30	52	55	40	45	10
SVC 1E	223 ~ 257	160	80	60	38	130	35	29	35	60	65	48	53	12
SVC 1.5E	254 ~ 290	174	88	67	42	150	39	33	45	76	74	55	67	14
SVC 2E	292 ~ 335	194	97	73	45	162	43	37	55	94	76	58	83	16