

# INTERNAL EXPANDING LIFTING CLAMP

for U-shaped concrete gutters (Non-marring type)



## BUC 300H·500H

Clamp designed for lifting of reinforced concrete U-shaped gutters (Clamping range adjustable design)

### FEATURES

- Equipped with the crack prevention holders for reinforced concrete U-shaped gutters(Use with the main body)
- This clamp is suitable for four or two different sized work pieces.
- The expansion pad (option) will allow more clamping range.
- The automatic unlocking mechanism can make attaching and detaching more easier.
- The special durable polyurethane rubber is applied on the pads to protect insides of U-shaped concrete gutters from damage.
- The clamp will not interfere with a leveling string and will not need a clearance between concrete structures.


### EXAMPLES OF USE

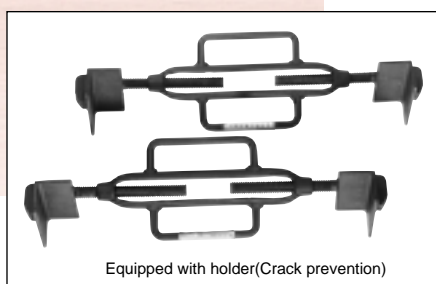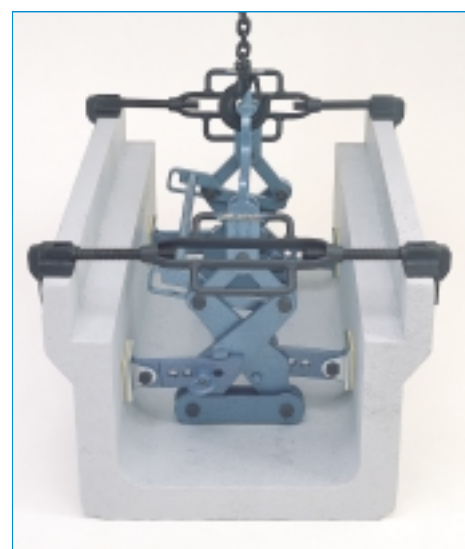

### SPECIFICATIONS

Item No.	Rated capacity (kg)	Clamping range (mm)		Weight (kg)	Remarks
		Normal pad	Extension pad		
BUC 300H	1000	260	286 ~ 306	25	
		310 ~ 330	336 ~ 356		
		360 ~ 380	386 ~ 406		
		410 ~ 430	436 ~ 456		
BUC 500H	2000	420 ~ 460	446 ~ 486	45	
		520 ~ 560	546 ~ 586		


The clamping range can be extended with the extension pads (optional extra).

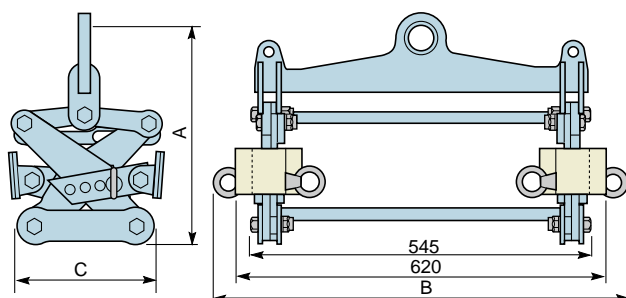

DIMENSIONS TABLE

(Unit:mm)

Item No.	A	B	C
BUC 300H	360 ~ 420	680	220
BUC 500H	480 ~ 580	700	480

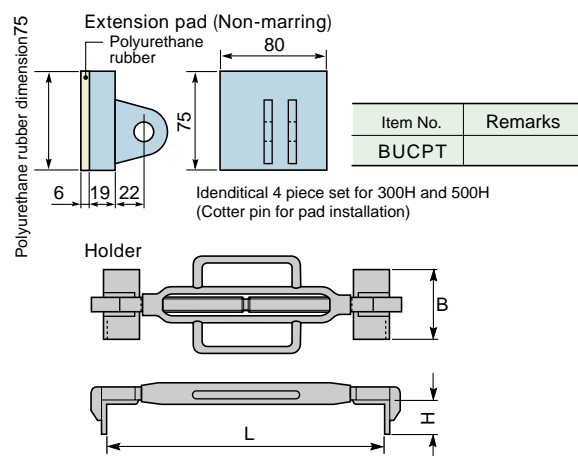

DIMENSIONS TABLE (Holder)

(Unit:mm)

Item No.	L	B	H
for BUC 300H	390 ~ 630	100	50
for BUC 500H	580 ~ 850	110	65